




JCB DIESELMAX

ECOMAX™

# JCB DIESELMAX ECOMAX TIER 4 ENGINE 55kW 444

## MOBILE MACHINERY

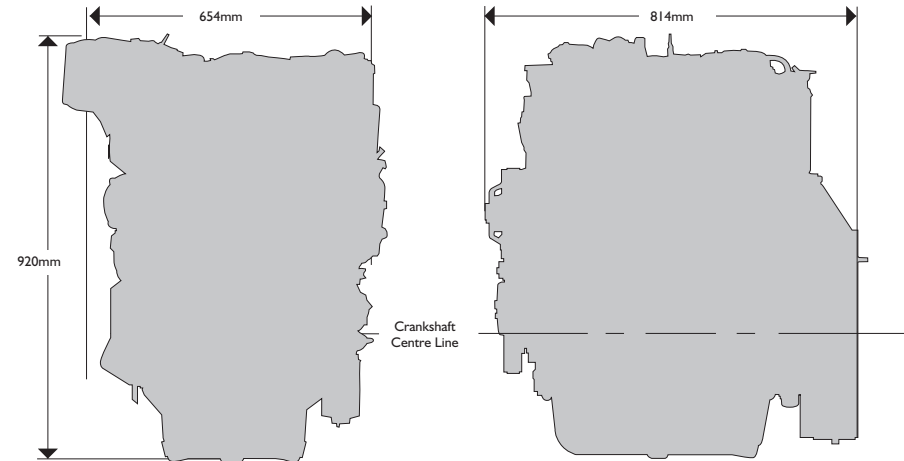

## GENERAL TECHNICAL DATA

		55kW
Thermodynamic cycle		Diesel 4 stroke
Air intake		TCAE
Arrangement		In-line 4 cyl.
Bore	mm	103
Stroke	mm	132
Swept volume	cm <sup>3</sup>	4399
Mean piston speed at rated speed	m/s	9.68
Valves per cylinder		4
Cooling		Liquid
Direction of rotation (viewed from crank nose)		Clockwise
Compression ratio		16.7

		55kW
Rotational mass moment of inertia excluding flywheel.	kgm <sup>2</sup>	0.2255
Standard flywheel inertia	kgm <sup>2</sup>	0.4061
Maximum rating *(intermittent)	kW	55
Rated speed	rpm	2200
Maximum torque	Nm	400
Maximum torque speed – constant	rpm	1200-1300
Maximum no load governed speed	rpm	2450
Nominal idling speed	rpm	850
BMEP at maximum torque	bar	11.4
BMEP at rated speed	bar	6.8
Minimum starting temperature without auxiliaries	°C	-20

\*As per ISO 14396 (nett power without fan)




JCB DIESELMAX


ECOMAX

# JCB DIESELMAX TIER 4 ENGINE 55kW 444


## TORQUE CURVES

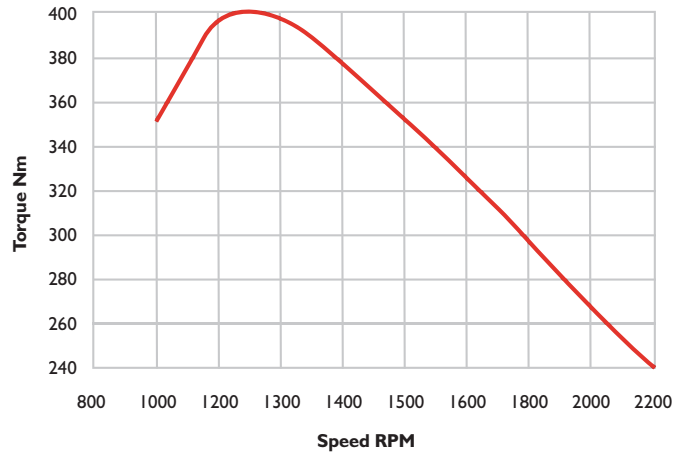


## POWER CURVES

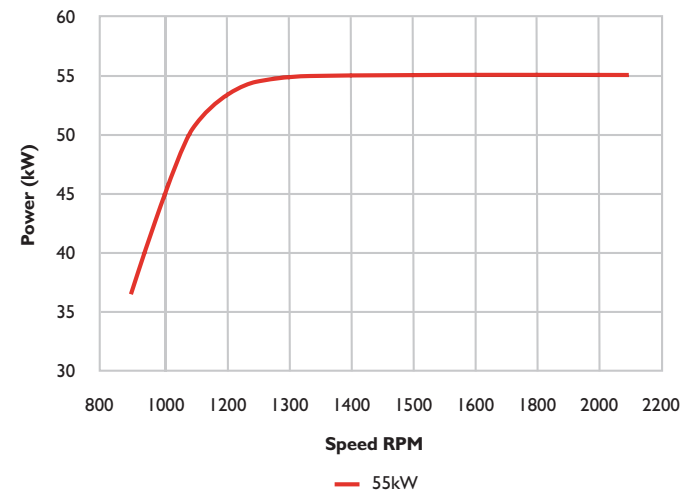

## FUEL CONSUMPTION

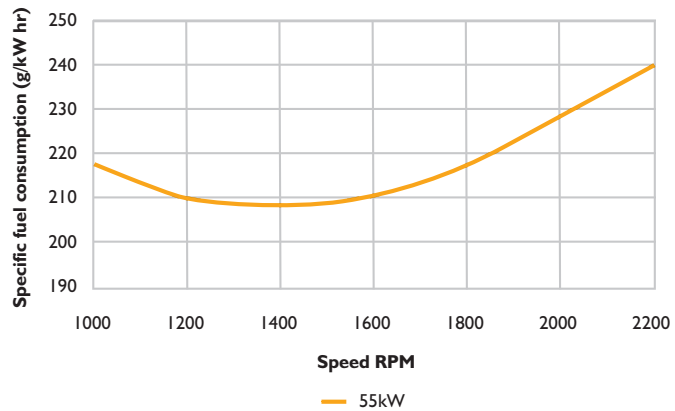

- Low cost of ownership
- Constant power 55kW Tier 4 Final
- Improved response compared to Tier 3
- Packaging benefits
- Fuel consumption 5-10% improvement over Tier 3



JCB Power Systems Ltd., Dove Valley Park, Foston, Derby DE65 5BX. Tel: 01889 590312. [www.jcbpowersystems.com](http://www.jcbpowersystems.com)

JCB reserves the right to change specifications without notice. Illustrations shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.



Preliminary 9999/5482 01/11 Issue 2