


Kenco Oil Tank



Asco Valve



Kenco Oil Level Shutdown



Gill Ignition System



LP Fuel System



Northstar Battery



Lubrifier



Installed Gas Regulator



Power Distribution Box with Camlocks






Block Heater



Battery Shut-off Switch



Deep Sea Controls

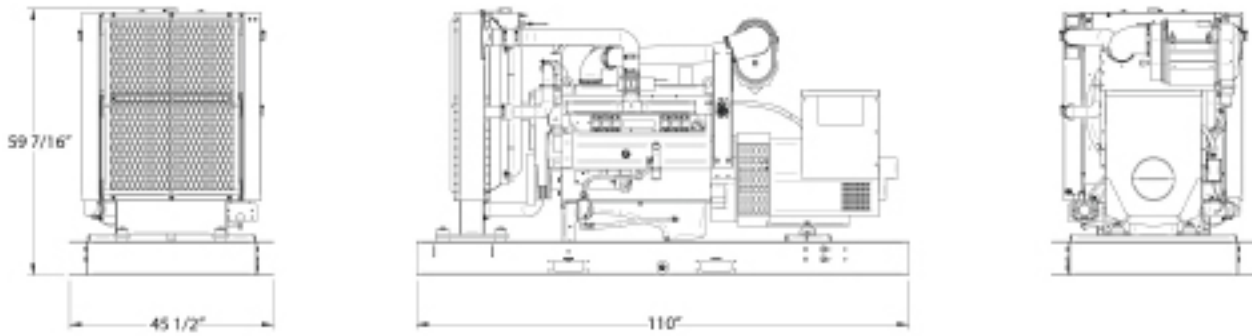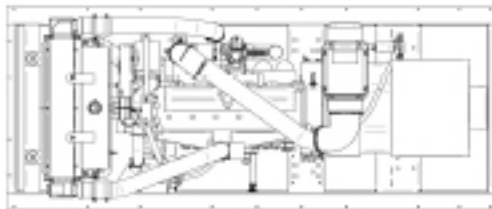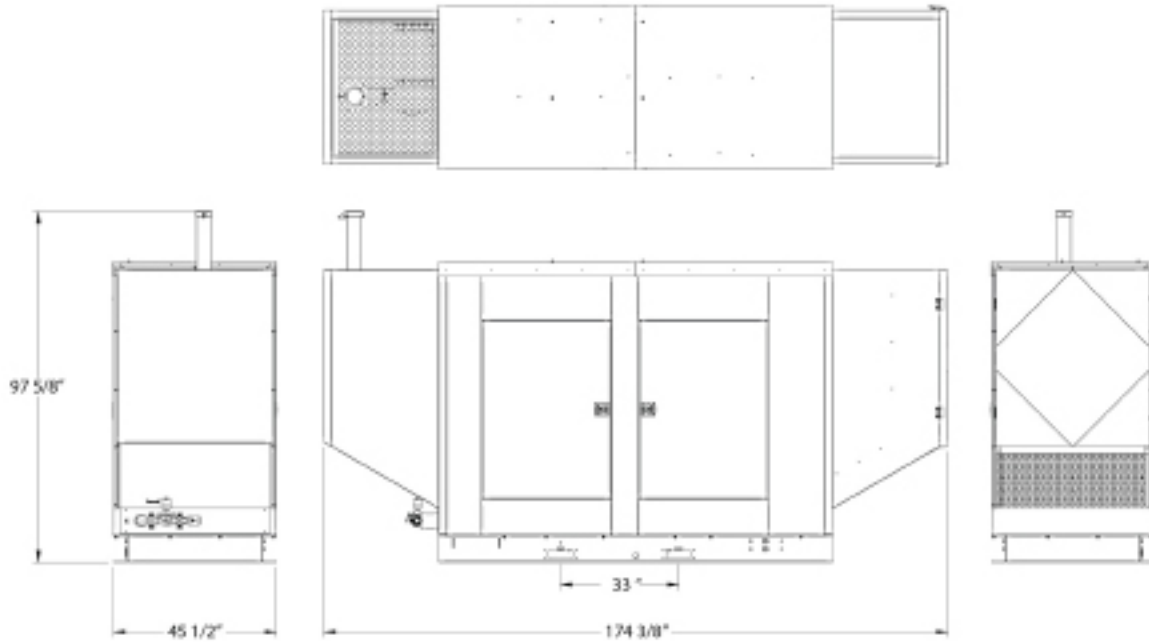

PART NUMBER	SRC 466			
NG/LP ENGINE		SRC 466 Enclosed 150kw		
Manufacturer	SRC			
Model	N106131			
Engine Size	7.6L			
Front engine mount	Std.			
Industrial oil pan with fittings welded in (36L / 9.4Gallons)	Std.			
EPA Compliant	Std.			
Oil Drain System	Std.			
GAC Governor	Elect.			
Starter	Std.			
Alternator (12 volt)	Std.			
Belt Guards	Std.			
SAE #2 rear housing and SAE Flywheel	Std.			
CONTROL PANEL				
Digital Control panel: (displays hours, electrical and mechanical values, alarms and safety shutdowns)	Deep sea 7310			
Fully Enclosed	Std.			
Check Engine Light	Std.			
Emergency Shutdown	Std.			
Keyless Ignition Switch	Std.			
Battery cables	Std.			
Batteries installed	Std.			
FUEL SYSTEM				
EPA compliant fuel system dual fuel (Nat gas / LP)	Std.			
EPA compliant Vapor Propane fuel system	Opt.			
EPA compliant Nat gas fuel system	Opt.			
EPA compliant LP fuel system	Opt.			
Automated dual fuel switch	Opt.			
EXHAUST SYSTEM				
EPA Compliant	Std.			
Pre and Post O2 sensors	Std.			
3 way catalyst	Std.			
Muffler	Std.			
Exhaust and turbo blankets	Std.			
SKID BASE				
Heavy Duty frame rails and crossmembers	Std.			
Fully Welded design with bolt in gen. cross member	Std.			
Battery tray	Std.			
Forklift pockets	Std.			
Fluid containment	Std.			
COOLING SYSTEM				
Heavy Duty Aluminum radiator	Std.			
Heavy Duty Charge air cooler	Std.			
Pusher fan	Std.			
ENCLOSURE				
Heavy Duty galvanized steel enclosure	Std.			
Powder Coated white or grey panels	Std.			
Lockable doors	Std.			
Easy Access for main power hook up	Std.			
Easy access for radiator maintenance	Std.			
Easy access for air cleaner maintenance	Std.			
GENERATOR				
Stamford Newage UC1274G	Std.			
250 amp Allen Bradley breaker	Std.			
Receptacles with GFI protection for 110v duplex 20amp rated	Opt.			
Battery disconnect switch	Std.			
Electrical panel with main power connections	Std.			
EXTENDED OIL SERVICE SYSTEM				
Luberfiner 750-CT W/ fittings and hoses	Std.			
Kenco Day tank (5 gallon)	Std.			
8.5 gallons of oil (5W30)	Std.			
Kenco Low oil shut down	Std.			
TELEMETRY				
ZTR telemetry system (Cellular service)	Std.			
ZTR telemetry system (Satellite service)	Opt.			
Geofencing	Std.			
GPS location	Std.			
Maintenance reminder	Std.			