


DIMENSIONS Unit=mm(in.)

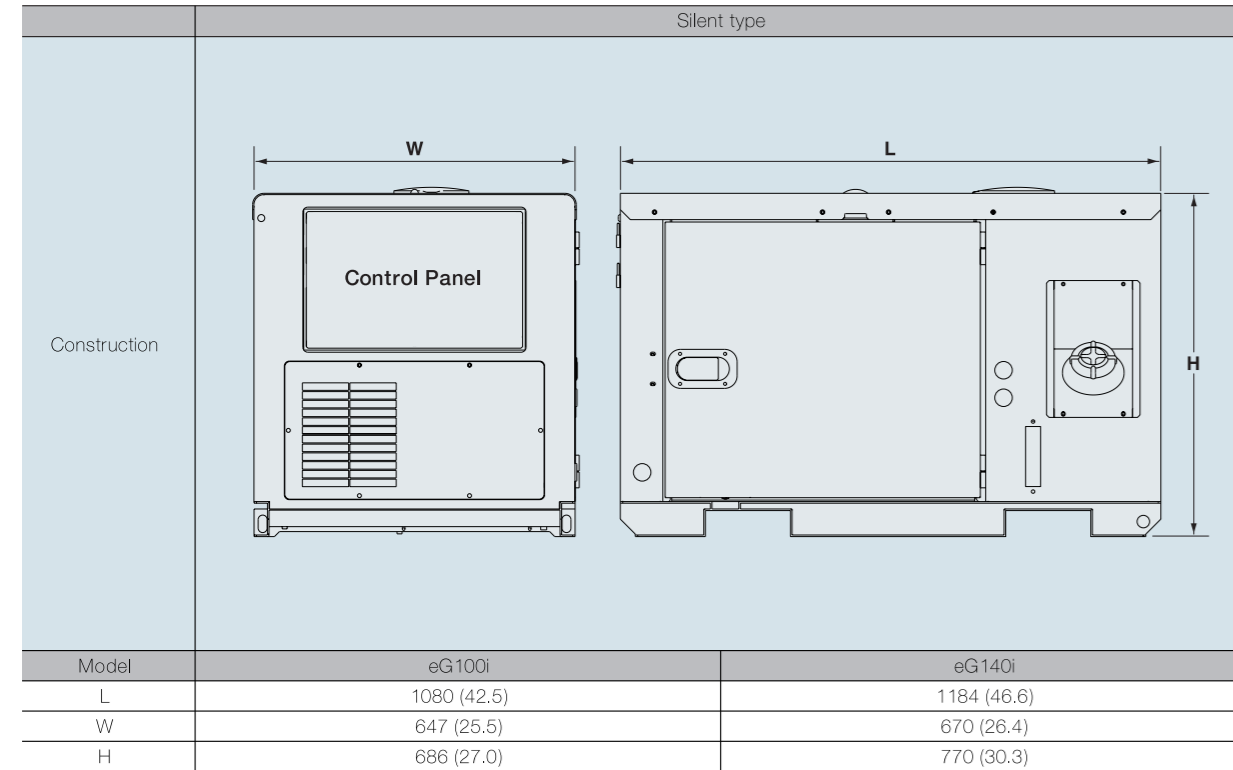

ACCESSORIES

○:Standard ▲:Option

Model	Silent type	eG100i	eG140i	
Generator control panel	AC voltmeter	○	○	
	Circuit breaker	○	○	
	Pilot lamp	○	○	
Engine control panel	Engine speed (7seg,Display)	○	○	
	Hour meter (7seg,Display)	○	○	
	Fuel level gauge	○	○	
	Starting key switch	○	○	
	7seg,Display	Water temp.(E052)	○	○
		L.O press.(E051)	○	○
Warning lamp	Battery charge	○	○	
	High water temp.	○	○	
Protection system	Low oil press.	○	○	
	Battery charge	○	○	
	Over current shut off trip	○	○	
Output terminal	Concent	○	○	
	terminal bolt	▲	▲	
Others	Remote start/stop system	▲	▲	
	Automatic start/stop system	▲	▲	
	Terminal for AMF/ATS panels	○	○	



WATER - COOLED DIESEL GENERATORS

# eG-i series

Generator Output **Inverter**  
7.5kVA·11kVA



**Yanmar America Corp.**

951 Corporate Grove Drive, Buffalo Grove, IL 60089-4508, U.S.A.  
Tel : 1-847-541-1900 [www.yanmar.com](http://www.yanmar.com)

**Yanmar Asia (Singapore) Corporation Pte. Ltd.**

4 Tuas Lane, Singapore 638613  
Tel : 65-6595-4200 [www.yanmar.co.jp/yasc](http://www.yanmar.co.jp/yasc)

**Yanmar Engine (Shanghai) Co., Ltd.**

18F, North Tower, Shanghai Stock Exchange Building 528  
South Pudong Road, Pudong Shanghai, China 200120  
Tel : 86-021-68805090 [www.yanmar-sha.com](http://www.yanmar-sha.com)

**Yanmar Europe B.V.**

Brugplein 11, 1332 BS Almere-de Vaart, The Netherlands  
Tel : 31-36-5493200 [www.yanmar.nl](http://www.yanmar.nl)

**Yanmar Italy S.p.A.**

Via Carlo Noe', 43/A, 21013 Gallarate (Varese), Italy  
Tel : 39-0331-706.601 [www.yanmaritaly.it](http://www.yanmaritaly.it)

**Yanmar Co., Ltd.**

1-32, Chayamachi, Kita-ku, Osaka 530-8311, Japan  
Tel : 81-6-6376-6411 [www.yanmar.co.jp/en/](http://www.yanmar.co.jp/en/)



**YANMAR CO.,LTD.**

1-32, Chayamachi, Kita-ku, Osaka 530-8311, Japan  
Tel:+81-6-6376-6411 Fax:+81-6-6377-1243  
[www.yanmar.co.jp/en/](http://www.yanmar.co.jp/en/)

All data subject to change without notice.

